


The PK 60 E projector head sets new standards with its patented electronic intermittent: perfect picture steadiness, perfect focus and contrast.

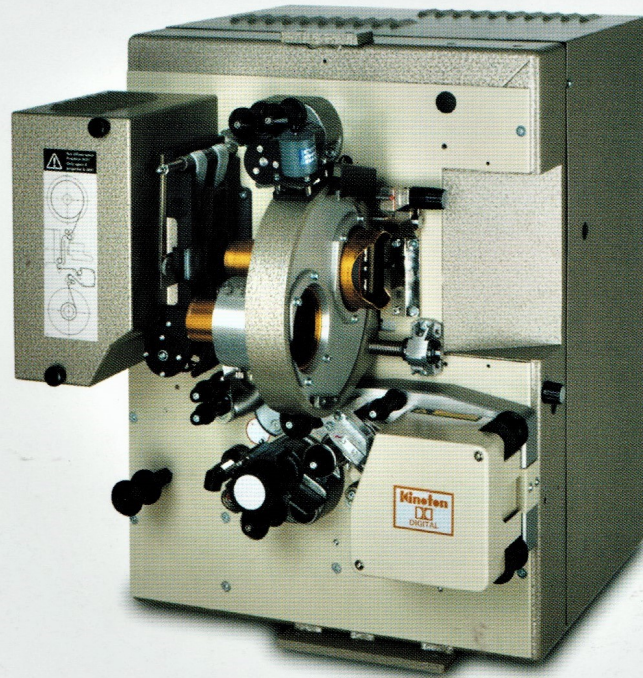

Projector Head PK 60 E

- perfect picture steadiness due to electronic control system
- excellent focus and contrast
- high optical efficiency due to longer dwell time of the picture in aperture
- continuous electronic framing device
- synchronous running electronically controlled shutter for increased brightness and flicker-free projection at all speeds
- mounts to all standard consoles and accepts different cue detectors and reel arms
- curved film gate for optimum focus, even with the most difficult film stock
- safe and precise film transport
- easy connection to any automation or ancillary equipment
- electronic interlock available
- operates from American or European electric supply
- easy access to all components
- quick installation and easy operation
- just like all Kinoton products: perfectly reliable and virtually maintenance-free

For more information visit our website:

www.kinoton.com/pk60e.htm

Technical Data:

Line frequency:	50 Hz / 60 Hz
Line voltage:	110 V / 120 V / 220 V / 240 V
Power consumption:	500 W
Net weight	75 kg (165 lbs)
Gross weight	100 kg (220 lbs)

Options:

- **Lens holder with quick-change lathe-bed style mount, pre-adjustable to optimum focus, 70.6 mm or 101.6 mm diameter**
- **Manual lens turret for two or three 70.6 mm lenses**
- **Automatic lens turret and aperture changer for two or three 70.6 mm lenses**
- **Remote focusing control**
- **Remote framing control**
- **35 mm optical sound device for Mono and Stereo prints**
- **Kinoton reverse scan sound device for 35 mm analog sound**
- **Kinoton reverse scan sound device for 35 mm analog sound and Dolby digital sound**
- **Sound readers for Dolby, DTS and Sony SDDS digital sound**
- **Full remote control of projector**



Kinoton GMBH
Cinema and Studio Technology

E-mail: welcome@kinoton.de
Tel. +49(0)89/89 44 46-0
Fax +49(0)89/8 40 20 02
Industriestrasse 20a
D-82110 Germering